


FASTPASS - CONCRETE (PT-Pedestrian System)

35 Mils DFT

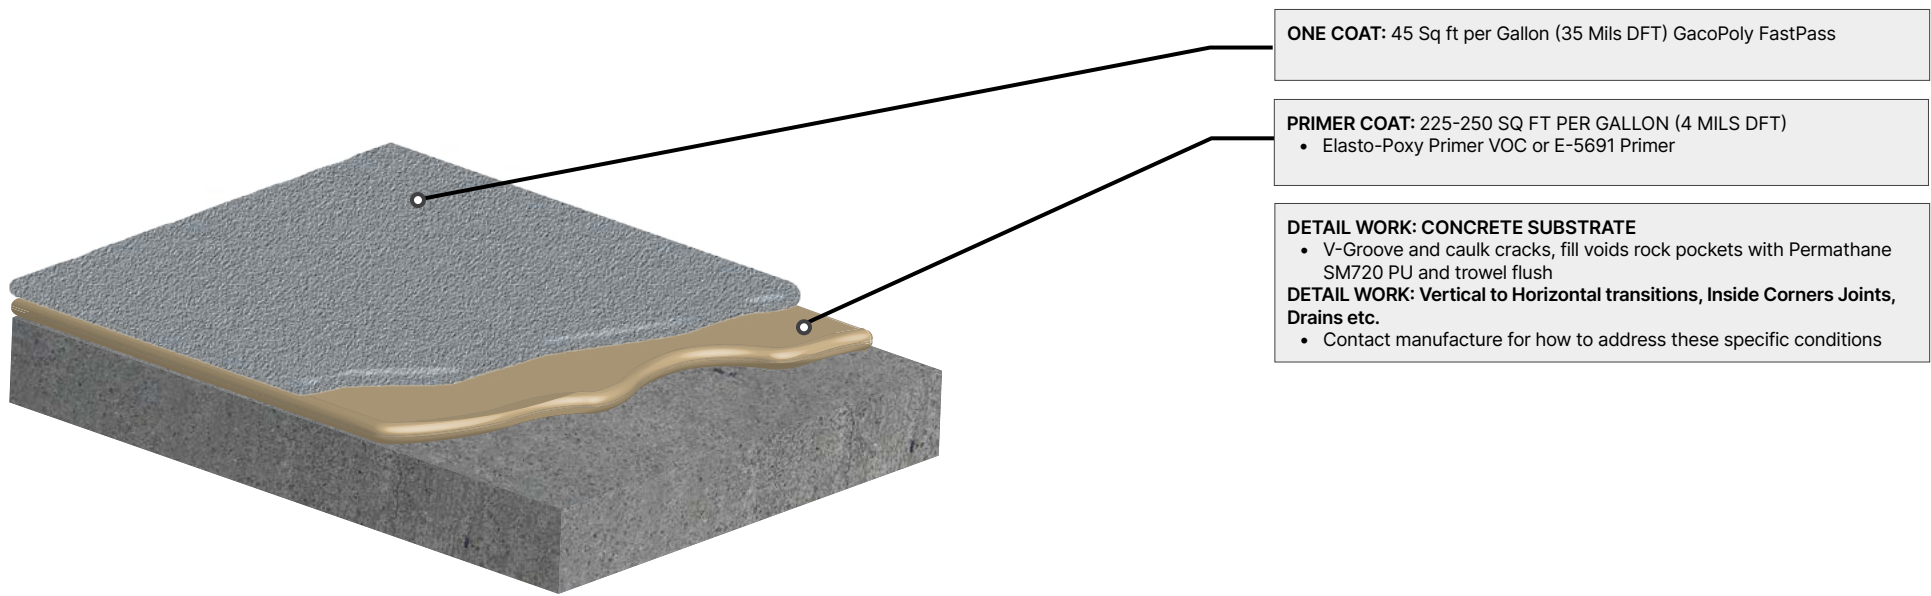

ONE COAT: 45 Sq ft per Gallon (35 Mils DFT) GacoPoly FastPass

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
 • Elasto-Poxy Primer VOC or E-5691 Primer

DETAIL WORK: CONCRETE SUBSTRATE
 • V-Groove and caulk cracks, fill voids rock pockets with Permathane SM720 PU and trowel flush
DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.
 • Contact manufacture for how to address these specific conditions

