# FASTPASS - CONCRETE
## (Heavy Duty Vehicular System)

Over occupied areas - 60 Mils DFT

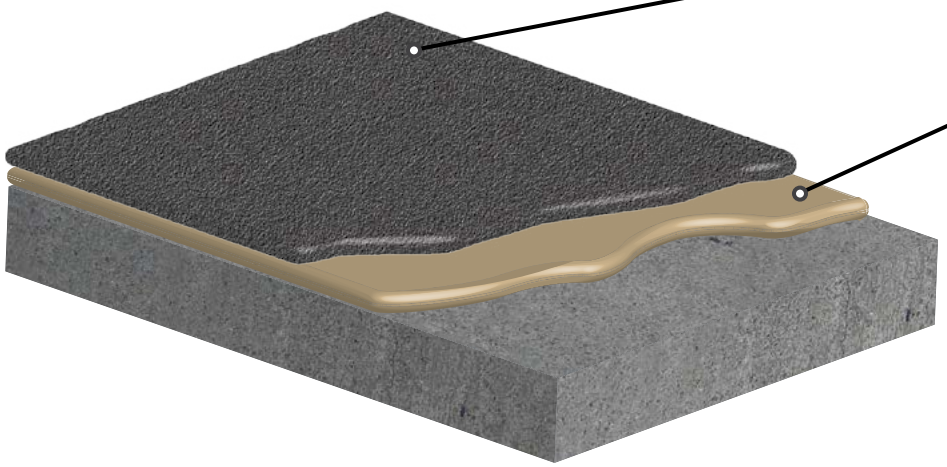

**ONE COAT:** 23 Sq ft per Gallon (60 Mils DFT)
- Elasto-Deck BT H2O
- While wet embed 40" Tie Tex Fabric overlapping 4"-6"

**PRIMER COAT:** 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or Deck-Thane Primer

**DETAIL WORK: CONCRETE SUBSTRATE**
- V-Groove and caulk cracks, fill voids rock pockets with Permathane SM720 PU and trowel flush
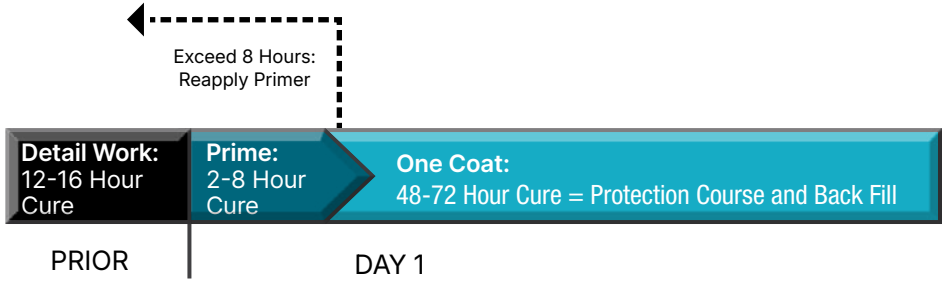
**DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.**
- Contact manufacture for how to address these specific conditions