Elasto-Deck BT DG
(Waterproofing - Concrete)

Over occupied areas - 60 Mils DFT

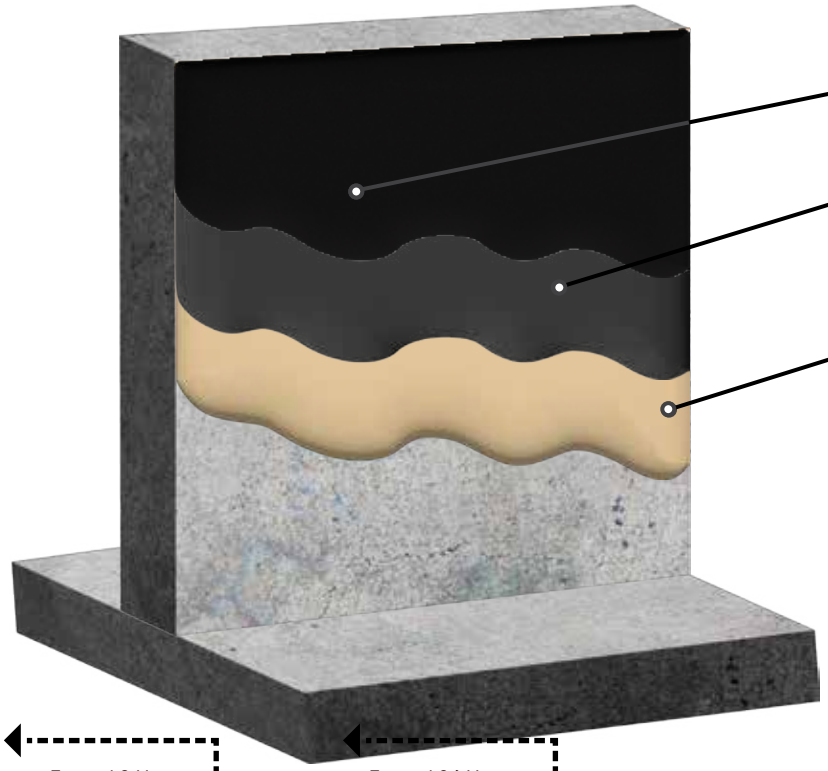

SECOND COAT: 42 SQ FT PER GALLON (30 MILS DFT)
- Elasto-Deck BT DG

FIRST COAT: 42 SQ FT PER GALLON (30 MILS DFT)
- Elasto-Deck BT DG

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate
1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush.

DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.
1. Contact manufacture for how to address these specific conditions

Exceed 8 Hours: Reapply Primer

Exceed 24 Hours: Prime with Elasto-Poxy VOC

PRIOR	DAY 1		DAY 2-5
Detail Work: 12-16 Hour Cure	**Prime:** 2-8 Hour Cure	**First Coat:** 12-16 Hour Cure	**Second Coat:** 48-72 Hour Cure = Protection Course & Back Fill