Elasto-Deck BT H2O
(Waterproofing - Concrete)

Over occupied areas - 60 Mils DFT

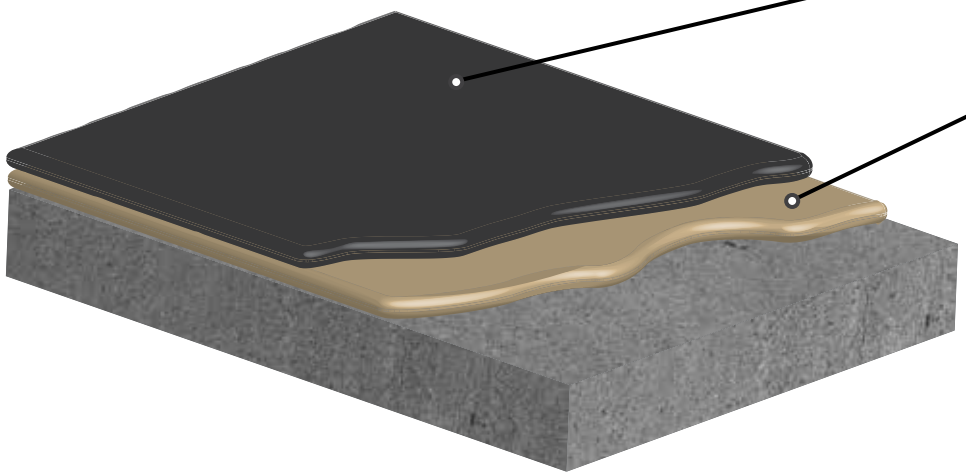

ONE COAT: 23 SQ FT PER GALLON (60 MILS DFT)
- Elasto-Deck BT H2O
- While wet embed 40″ Tie Tex Fabric overlapping 4″-6″

PRIMER COAT: 225-250 Sq ft per Gallon (4 Mils DFT)
- Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate
1. V-Groove and caulk cracks, fill voids rock pockets with Permathane SM720 PU and trowel flush
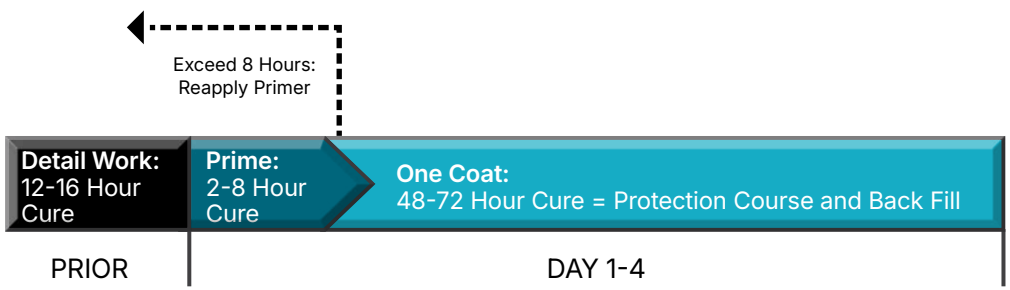
DETAIL WORK: ertical to Horizontal transitions, Inside Corners Joints, Drains etc.
1. Contact manufacture for how to address these specific conditions