Elasto-Deck BT H2O
(Waterproofing - Fabric Concrete)

Over occupied areas - 90 Mils DFT

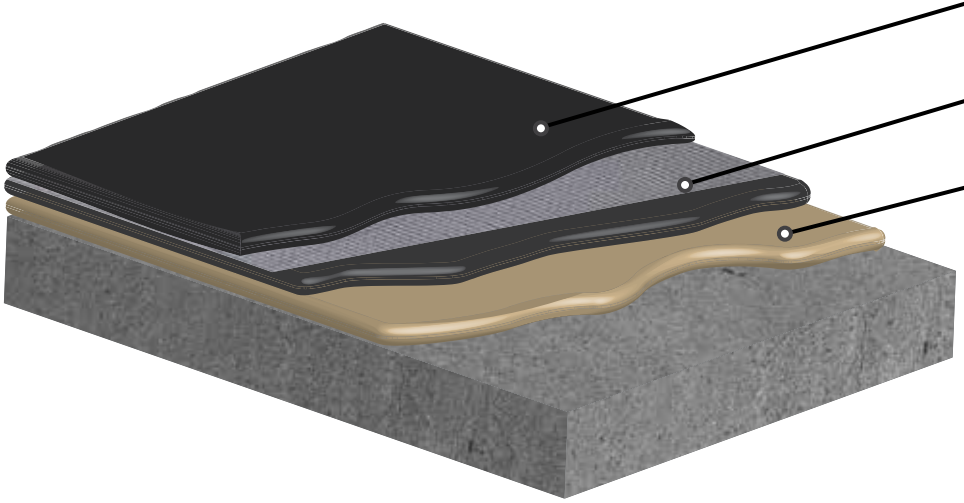

SECOND COAT: 42 SQ FT PER GALLON (30 MILS DFT)
- Elasto-Deck BT H2O

FIRST COAT: 22 SQ FT PER GALLON (60 MILS DFT)
- Elasto-Deck BT H2O
- While wet embed 40" Tie Tex Fabric overlapping

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate
1. V-Groove and caulk cracks, fill voids rock pockets with Permathane SM7120 PU and trowel flush
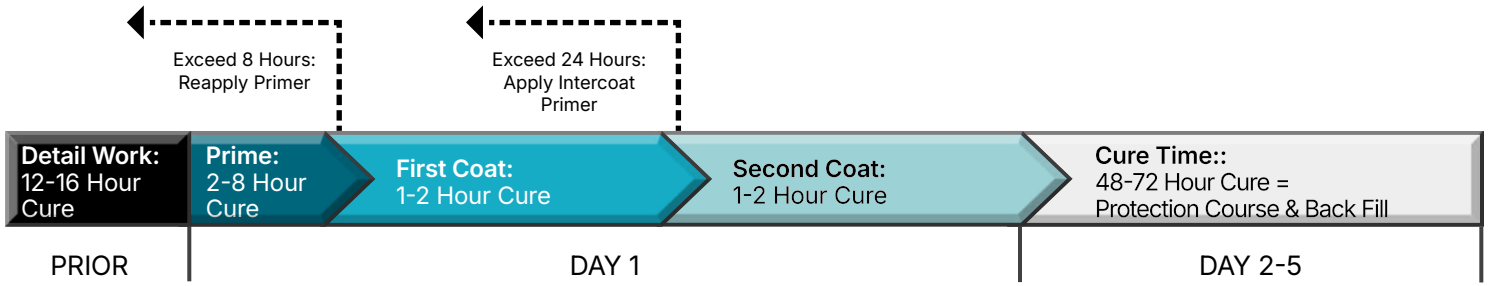
DETAIL WORK: VERTICAL TO HORIZONTAL TRANSITIONS, INSIDE CORNERS JOINTS, DRAINS ETC.
1. Contact manufacture for how to address these specific conditions