


NOTE:

1. FOR GENERAL REFERENCE ONLY – NOT INTENDED FOR PROJECT-SPECIFIC USE OR TO FULLY DEFINE A WARRANTY ELIGIBLE APPLICATION.
2. REFER TO LATEST REVISION OF APPROPRIATE APPLICATION SPECIFICATIONS, PRODUCT DATA SHEETS AND GENERAL INSTRUCTIONS FOR ADDITIONAL REQUIREMENTS.
3. NON-GACO ROOFING COMPONENTS AND HARDWARE ARE DEPICTED FOR CONTEXT-ONLY – NOT INTENDED AS A STATEMENT OF SPECIFICATION.
4. ENSURE SUFFICIENT RATING FOR CODES, APPROVALS & MAXIMUM STRUCTURAL LOAD(S).
5. PRODUCTS MUST OVERLAP AND BE SUFFICIENTLY ADHERED AND/OR FASTENED TO ENSURE COMPLETE WEATHER-TIGHTNESS.
6. MAINTAIN A MINIMUM THICKNESS OF 2 IN (50 MM) ACROSS THE ENTIRE APPLICATION AREA.

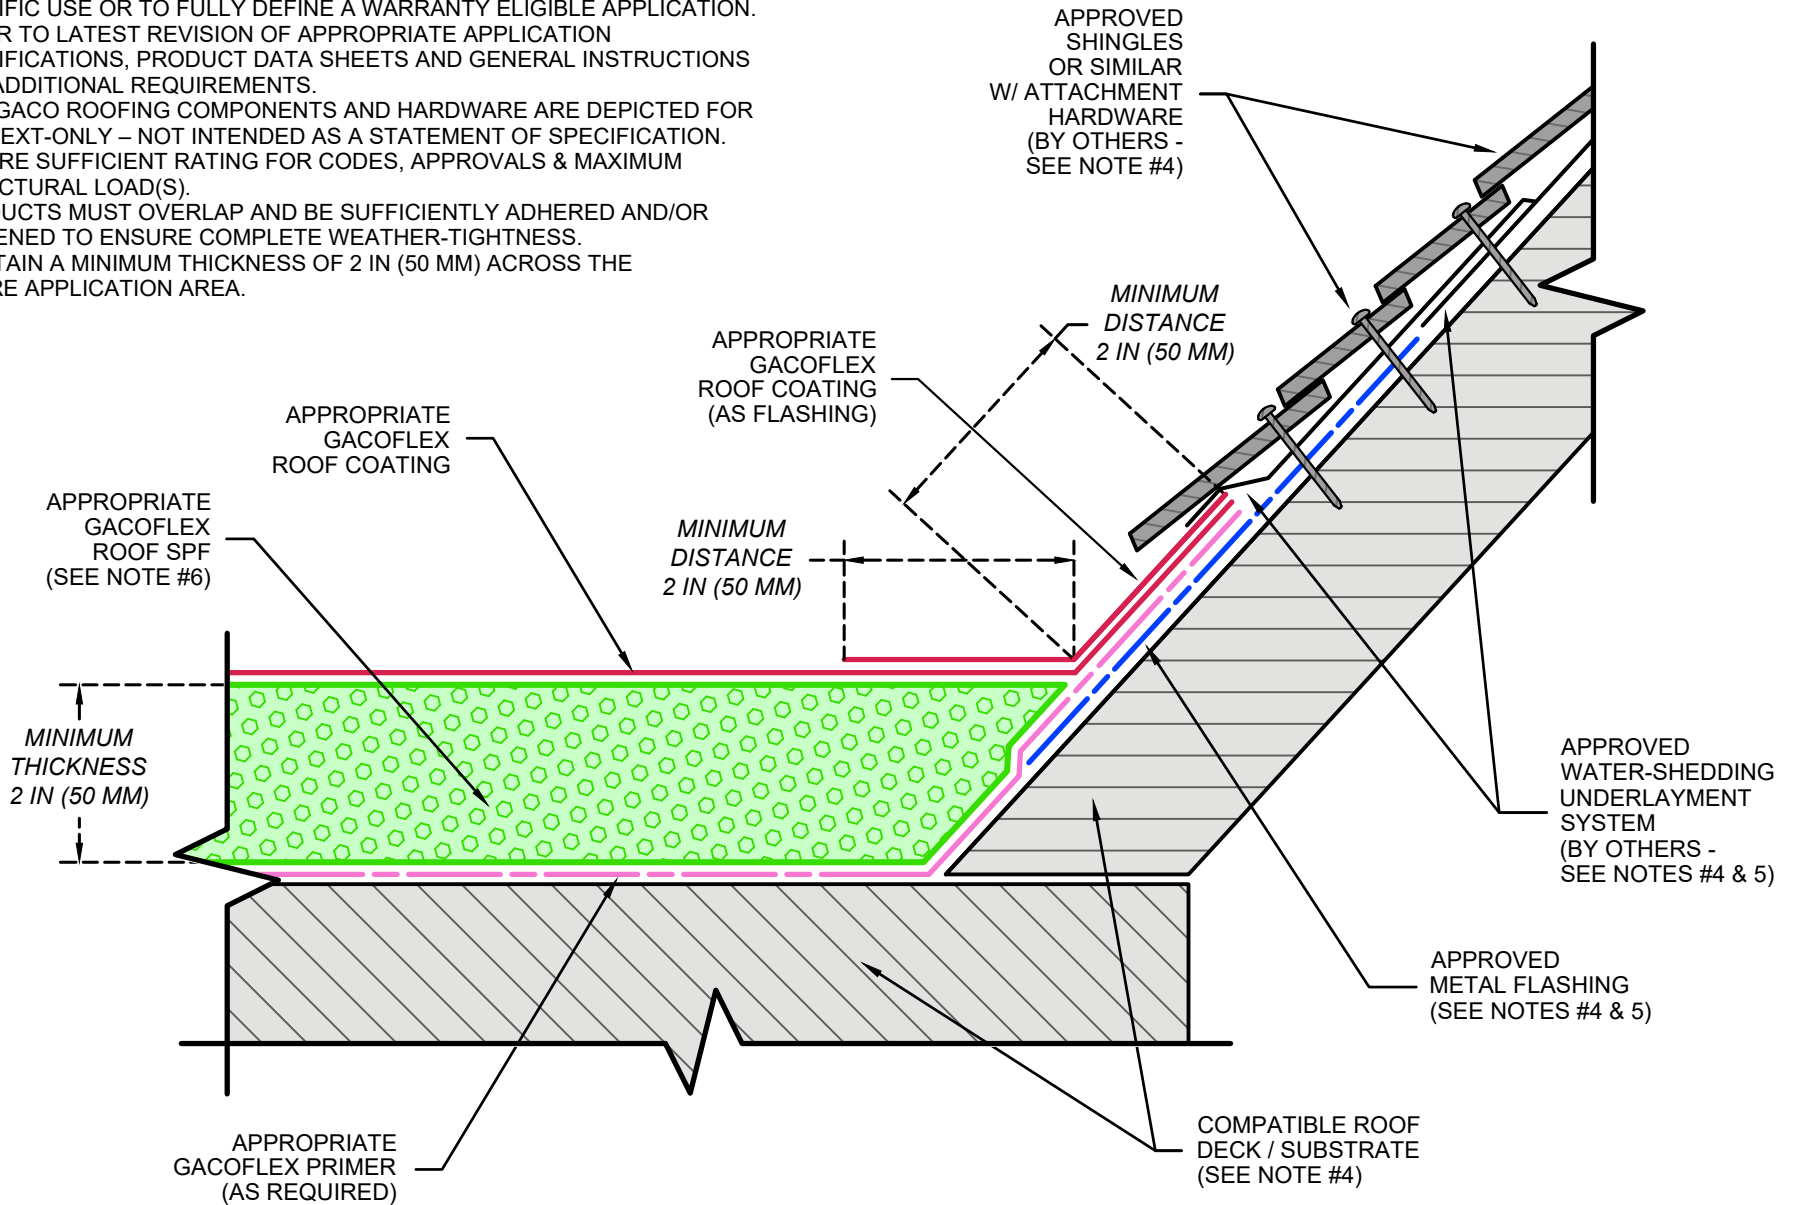

**TIE-IN BETWEEN FLAT & STEEP SLOPED ROOF
(SHINGLES OR SIMILAR)**

MAXIMUM WARRANTY TERM:
REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

Gaco™

GACOFLEX™ CATEGORY: | ROOFING SYSTEMS (RS)

COMPATIBLE SUBSTRATE TYPES: | REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

REVISION DATE:
07/28/2023

DETAIL NO.
GA-RS-TI-1

ADDITIONAL DOCUMENTATION AVAILABLE AT GACO.COM | CUSTOMER SERVICE - PHONE: (800) 331-0196 / E-MAIL: CUSTOMERSERVICE@GACO.COM

NOT TO SCALE