


NOTE:

1. FOR GENERAL REFERENCE ONLY – NOT INTENDED FOR PROJECT-SPECIFIC USE OR TO FULLY DEFINE A WARRANTY ELIGIBLE APPLICATION.
2. REFER TO LATEST REVISION OF APPROPRIATE APPLICATION SPECIFICATIONS, PRODUCT DATA SHEETS AND GENERAL INSTRUCTIONS FOR ADDITIONAL REQUIREMENTS.
3. NON-GACO ROOFING COMPONENTS AND HARDWARE ARE DEPICTED FOR CONTEXT-ONLY – NOT INTENDED AS A STATEMENT OF SPECIFICATION.
4. MINIMUM RECOMMENDED WIDTH OF 3 IN (75 MM).
5. MAXIMUM RECOMMENDED LENGTH OF 6 IN (150 MM).
6. APPROVED METAL FLASHING IS REQUIRED TO EXTEND UNDER APPROVED METAL ROOF PANEL BY A MINIMUM OF 12 IN (305 MM).
7. MAINTAIN A MINIMUM THICKNESS OF 2 IN (50 MM) ACROSS THE ENTIRE APPLICATION AREA.

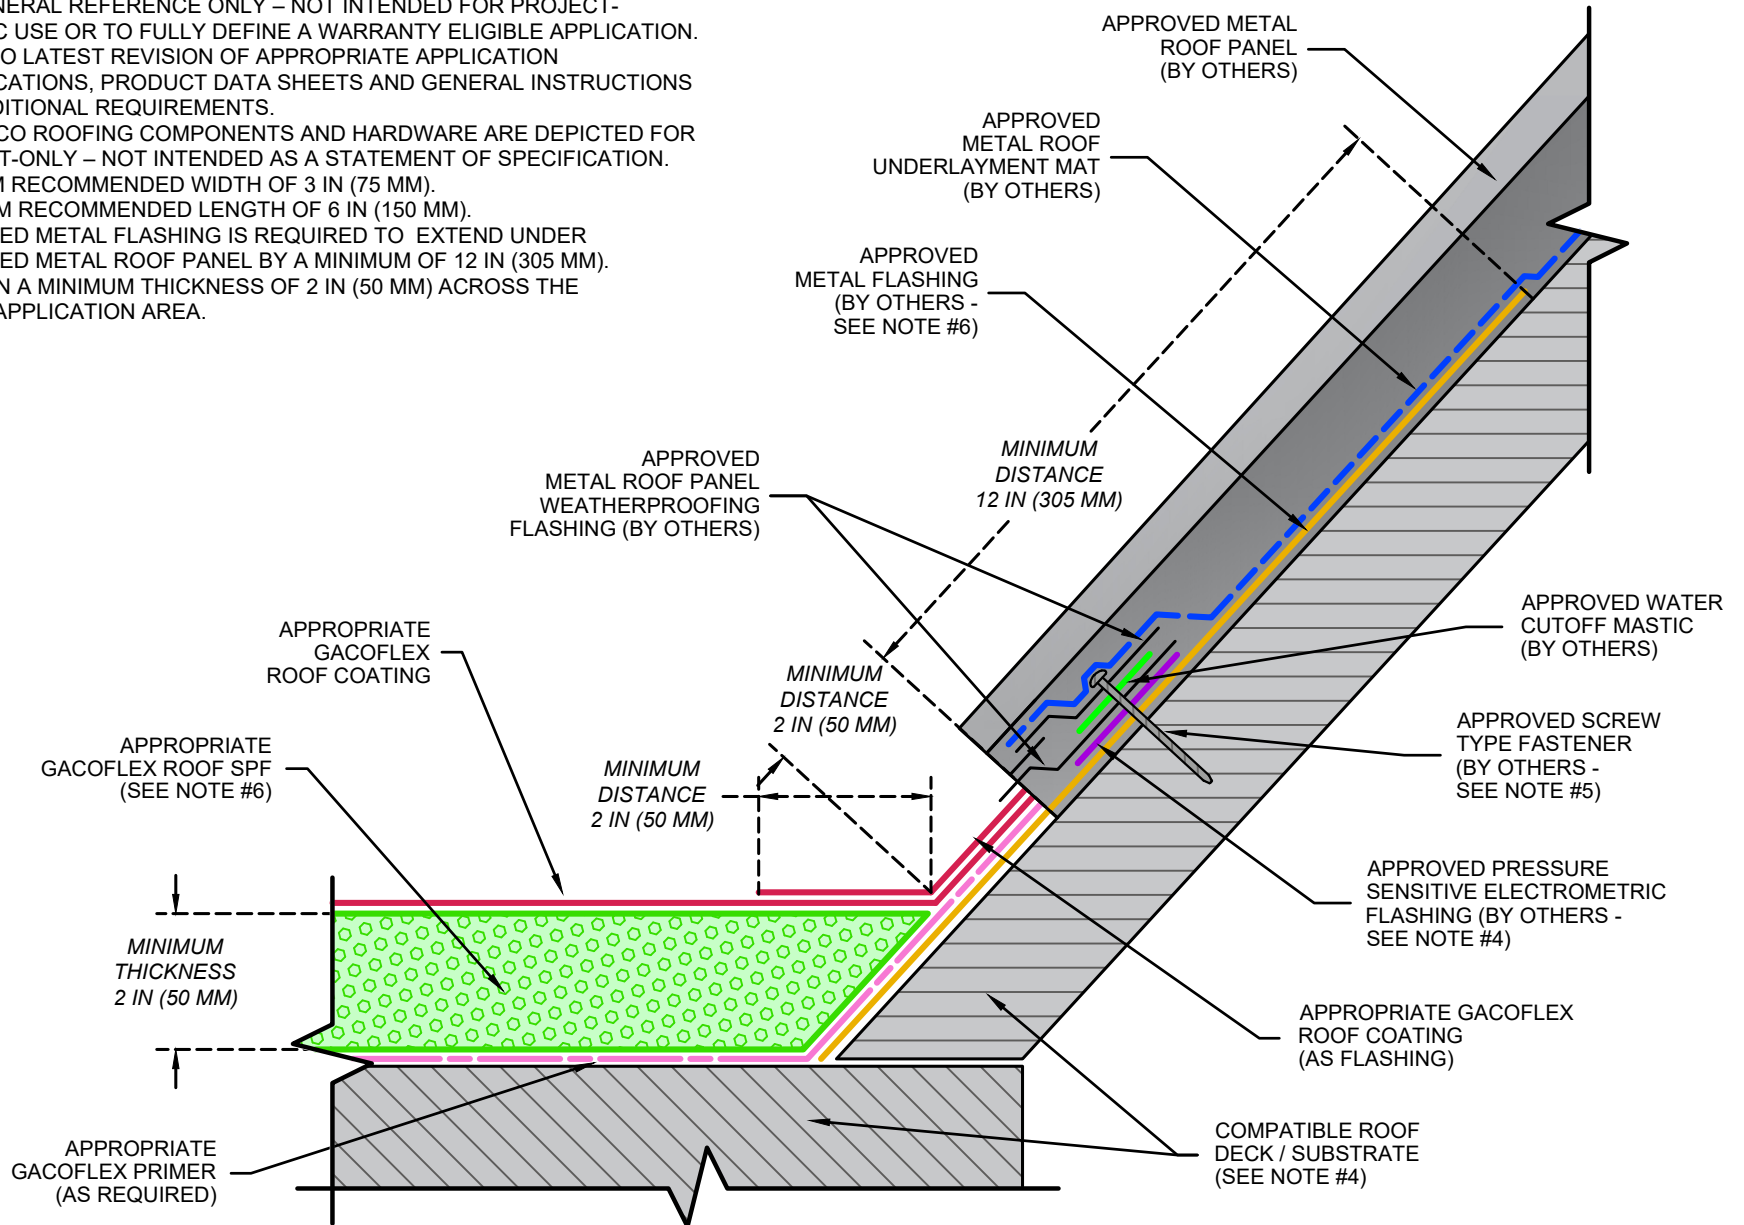

TIE-IN BETWEEN FLAT & STEEP SLOPED ROOF (METAL)

MAXIMUM WARRANTY TERM:
REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

GACOFLEX™ CATEGORY: | ROOFING SYSTEMS (RS)

COMPATIBLE SUBSTRATE TYPES: | REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

REVISION DATE:
07/31/2023

DETAIL NO.
GA-RS-TI-2