Elasto-Deck 5001HT-UTS
(Under Tile - Plywood)

Over occupied areas - 50 Mils DFT

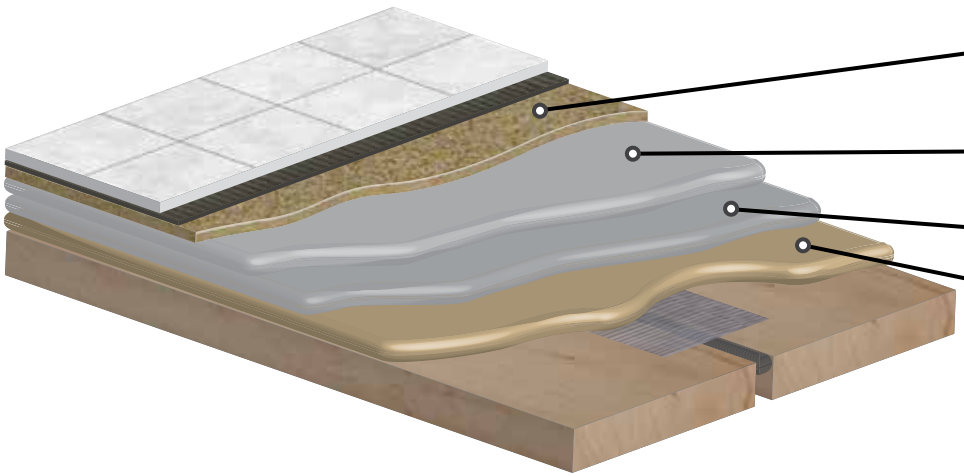

BROADCAST COAT: 100 SQ FT PER GALLON (12 MILS DFT)
- Elasto-Deck 5001HT
- While wet broadcast sand to refusal

SECOND BASE COAT: 60 SQ FT PER GALLON (20 MILS DFT)
- Elasto-Deck 5001HT

FIRST BASE COAT: 60 SQ FT PER GALLON (20 MILS DFT)
- Elasto-Deck 5001HT

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC
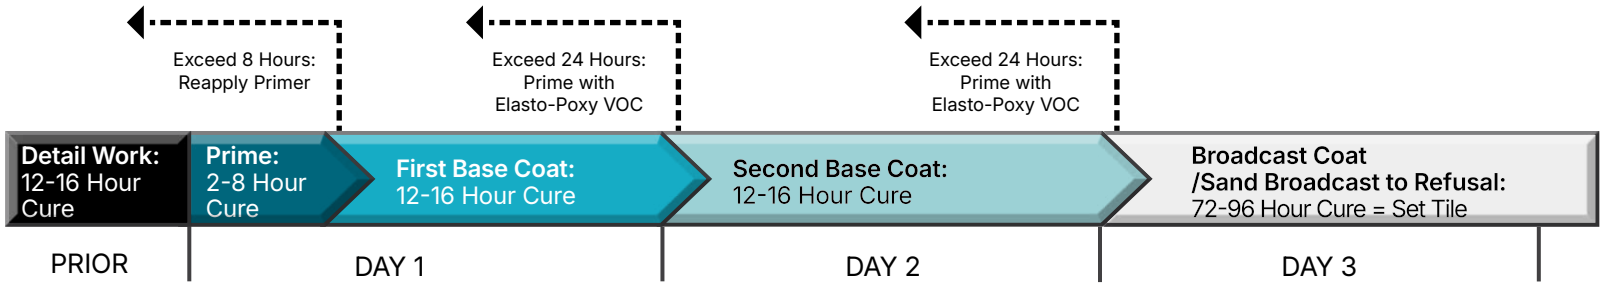
DETAIL WORK: METAL FLASHING AND PLYWOOD SEAMS
1. Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon- Until Tacky
2. Apply Elasto-Deck 5001HT or Permathane SM7120 PU
3. Embed 4" Tie-Tex Fabric into Elasto-Deck 5001HT or Permathane SM7120 PU