


Elasto-Deck BT DG (Waterproofing - Concrete)

Over occupied areas - 90 Mils DFT

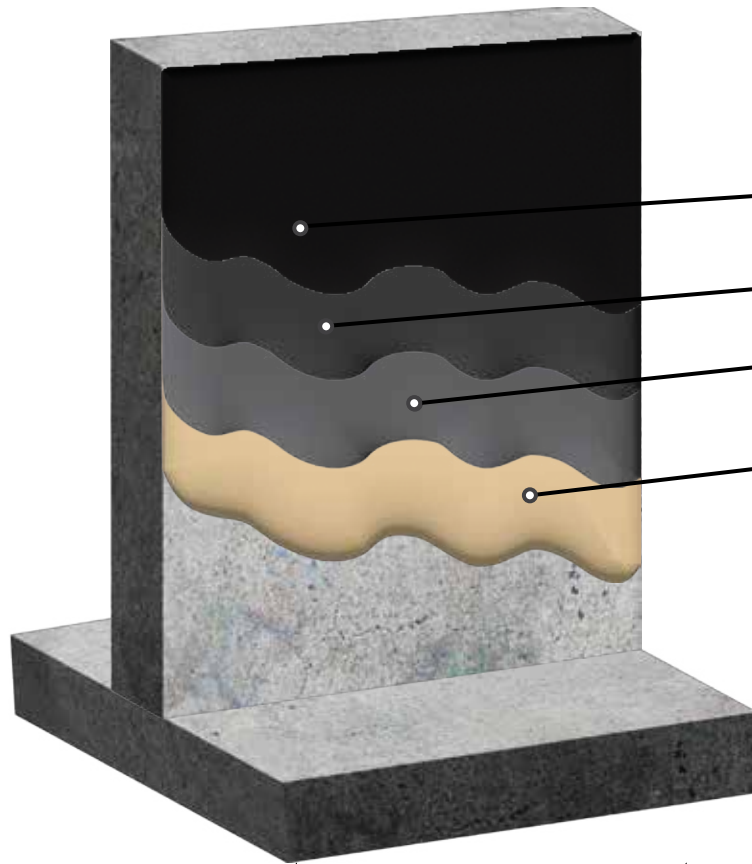

THIRD COAT: 42 SQ FT PER GALLON (30 MILS DFT)
• Elasto-Deck BT DG

SECOND COAT: 42 SQ FT PER GALLON (30 MILS DFT)
• Elasto-Deck BT DG

FIRST COAT: 42 SQ FT PER GALLON (30 MILS DFT)
• Elasto-Deck BT DG

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
• Elasto-Poxy Primer VOC or Deck-Thane Primer

DETAIL WORK: Concrete Substrate
1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush, fabric reinforce with Perma-Glas Mesh where needed
DETAIL WORK: Vertical to Horizontal transitions, Inside Corners Joints, Drains etc.
1. Contact manufacture for how to address these specific conditions

