Elasto-Deck BT H2O
(Waterproofing - Plywood)

Over occupied areas - 120 Mils DFT

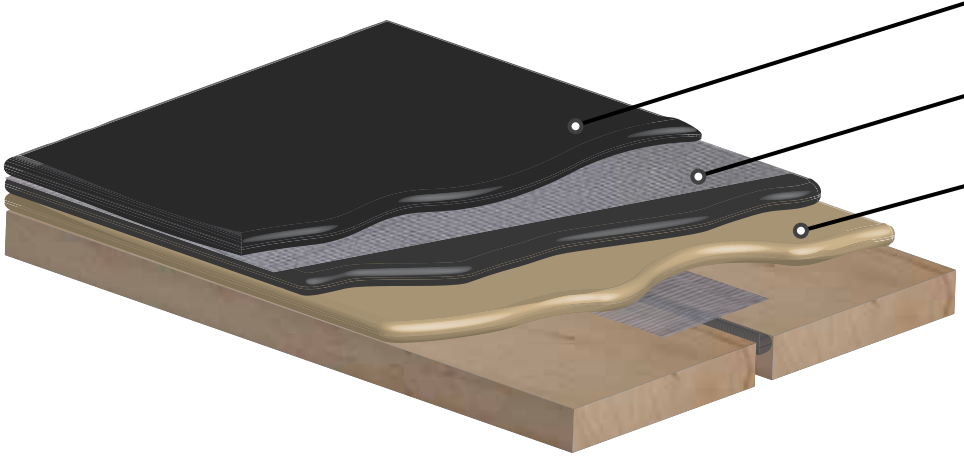

SECOND COAT: 22 SQ FT PER GALLON (60 MILS DFT)
- Elasto-Deck BT H2O

FIRST COAT: 22 SQ FT PER GALLON (60 MILS DFT)
- Elasto-Deck BT H2O
- While wet embed Tie-Tex Fabric overlapping 4”-6”

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or Deck-Thane Primer
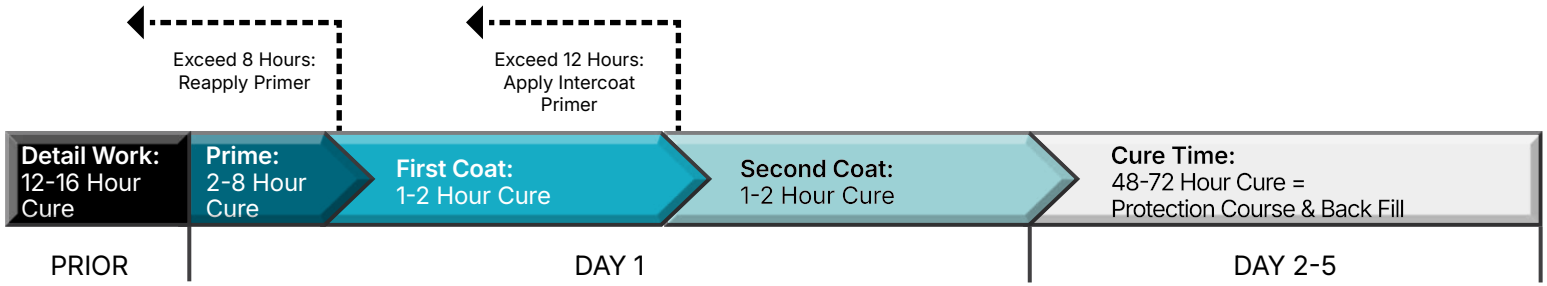
DETAIL WORK: METAL FLASHING, PLYWOOD SEAMS AND DRAINS
1. Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon - Until Tacky
2. Apply Elasto-Deck BT or Permathane SM7108
3. Embed 4” Tie-Tex Fabric