Elasto-Deck BT H2O
(Waterproofing - Plywood)

Over occupied areas - 60 Mils DFT

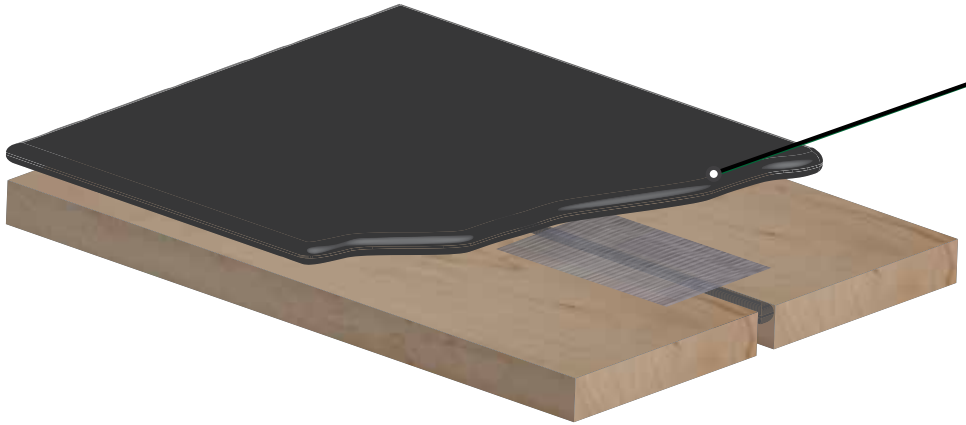

ONE COAT: 22 SQ FT PER GALLON (60 MILS DFT)
- Elasto-Deck BT H2O
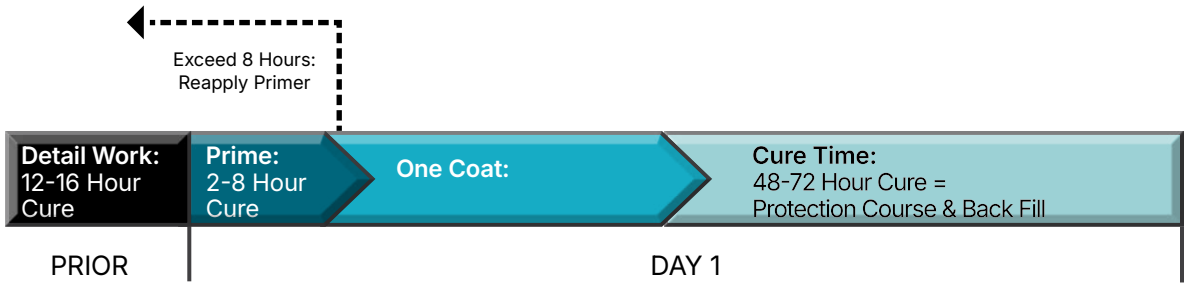
DETAIL WORK: SEAMS, METAL FLASHING AND DRAINS
1. Plywood Seams: Apply a stripe coat of Elasto-Deck BT H20 while wet embed 4″ Tie-Tex Fabric
2. Metal Flashing and Drains: Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon - Until Tacky. Over primer, apply a stripe coat of Elasto-Deck BT H20 and embed 4″ Tie-Tex Fabric
3. Apply Elasto-Deck BT or Permathane SM7120 PU
4. Embed 4″ Tie-Tex Fabric