


Elasto-Deck BT H2O (Waterproofing - Plywood)

Over occupied areas - 60 Mils DFT

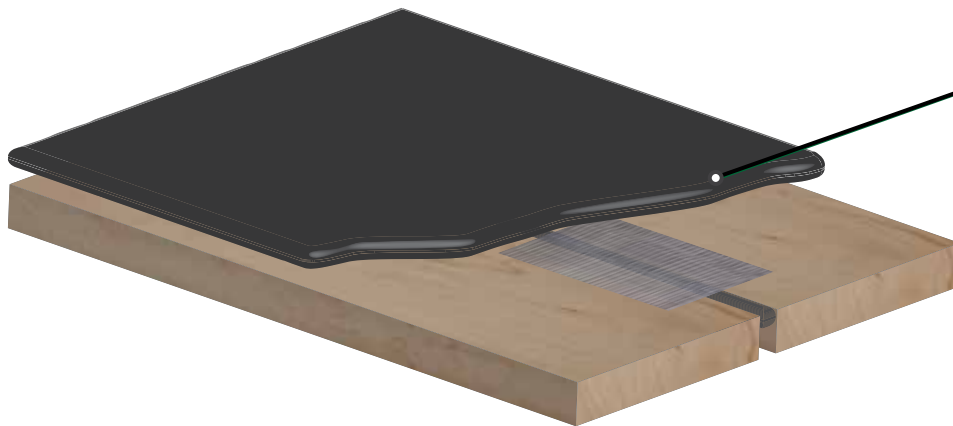

ONE COAT: 22 SQ FT PER GALLON (60 MILS DFT)
• Elasto-Deck BT H2O

DETAIL WORK: SEAMS, METAL FLASHING AND DRAINS

1. Plywood Seams: Apply a stripe coat of Elasto-Deck BT H2O while wet embed 4" Tie-TEX Fabric
2. Metal Flashing and Drains: Apply Elasto-Poxy Primer VOC @ 250 sqft per Gallon - Until Tacky. Over primer, apply a stripe coat of Elasto-Deck BT H2O and embed 4" Tie-TEX Fabric
3. Apply Elasto-Deck BT or Permathane SM7120 PU
4. Embed 4" Tie-TEX Fabric

