Elasto-Deck 5001HT-UTS
(Under Tile - Concrete)

Over occupied areas - 50 Mils DFT

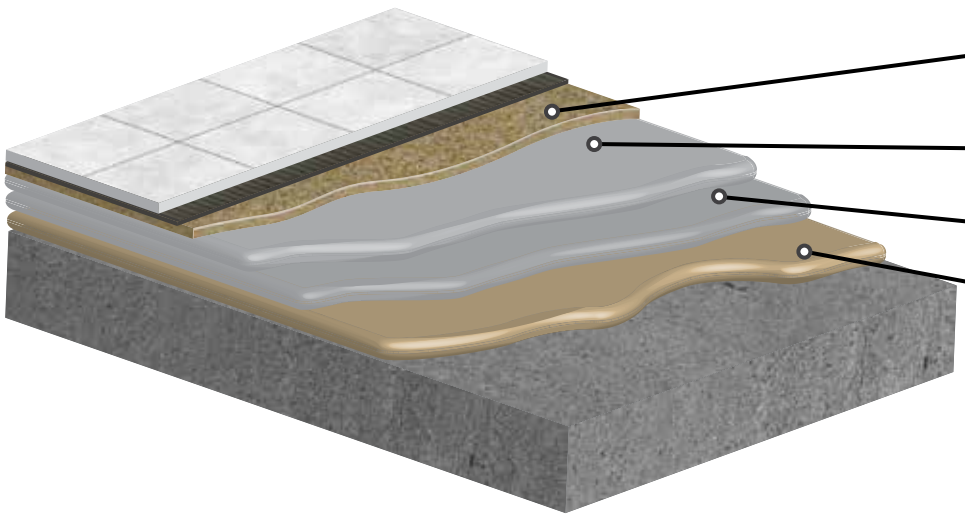

BROADCAST COAT: 100 SQ FT PER GALLON (12 MILS DFT)
- Elasto-Deck 5001HT
- While wet broadcast sand to refusal

SECOND BASE COAT: 60 SQ FT PER GALLON (20 MILS DFT)
- Elasto-Deck 5001HT

FIRST BASE COAT: 60 SQ FT PER GALLON (20 MILS DFT)
- Elasto-Deck 5001HT

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or WB

DETAIL WORK: CONCRETE SUBSTRATE
1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush, fabric reinforce with Perma-Glas Mesh where needed
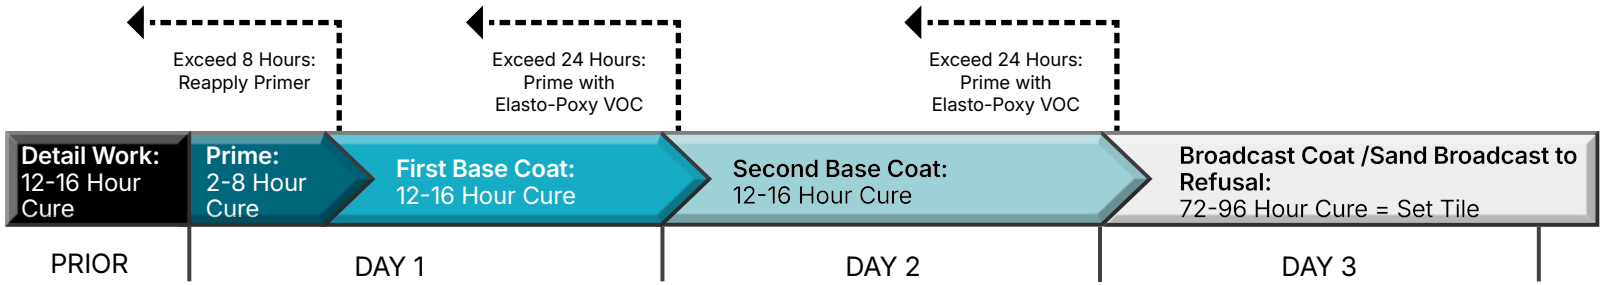
DETAIL WORK: CONTROL JOINTS AND EXPANSION JOINTS
2. Contact manufacture for how to address these specific conditions