Elasto-Deck 6500MR
(Mechanical Room System)

Over occupied areas - 35 Mils DFT

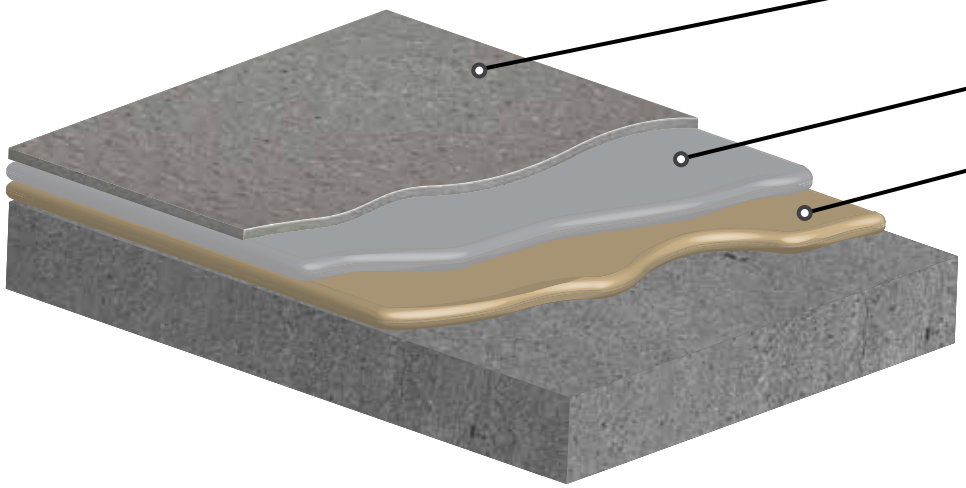

BROADCAST AND BACK ROLL COAT: 100 SQ FT PER GALLON (15 MILS DFT)
- Elasto-Deck 6500
- While wet Broadcast Sand uniformly 8-10 lbs. per 100 sq ft and back roll

BASE COAT: 80 SQ FT PER GALLON (20 MILS DFT)
- Elasto-Deck 6500

PRIMER COAT: 225-250 SQ FT PER GALLON (4 MILS DFT)
- Elasto-Poxy Primer VOC or WB

DETAIL WORK: Concrete Substrate
1. V-Groove and caulk cracks, caulk with Permathane SM7120 PU and trowel flush, fabric reinforce with Perma-Glas Mesh where needed
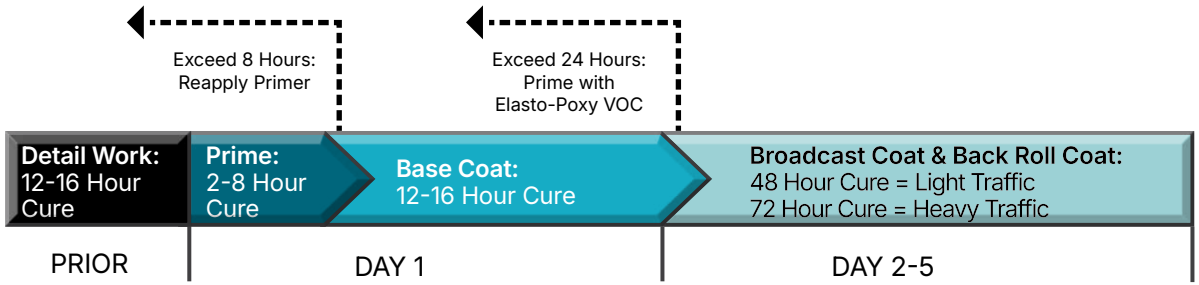
DETAIL WORK: Control Joints and Expansion Joints
1. Contact manufacture for how to address these specific conditions